

 LEDium

# K Plus Series

K2.9 Plus/K2.9D Plus/K3 Plus/K3D Plus





## K Plus Series

K2.9 Plus/K2.9D Plus/K3 Plus/K3D Plus



700Nit / 3000Nit



Pixel Pitch: 2.9mm / 3.9mm



Pixels: SMD

## Flexible Installation

90° corner screen support (Non-standard Panel)




Light Weight

11 kg

Thickness

65 mm

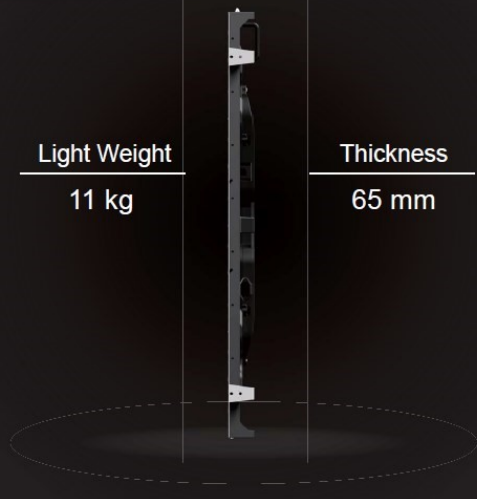




## Front & Rear

Installation and Maintenance



## Flatness

Precision finishing + CNC craft  
No bottom design

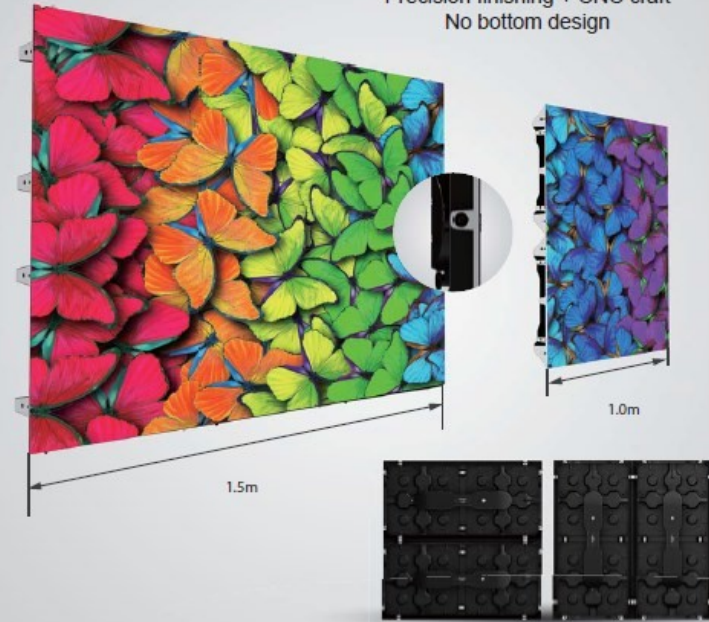

support rotate panel

## K Plus Series



Flatness

Precision finishing + CNC craft No bottom design



Flexible Installation

90° corner screen support (Non-standard Panel)



Parameters	K2.9 Plus	K2.9D Plus	K3 Plus	K3D Plus	Unit
Pixel Pitch	2.97		3.9		Millimeter
Pixel Type	Black SMD 2121	SMD 1921	Black SMD 2121	SMD 1921	
Brightness	700	3, 000	700	3, 000	nit
Fresh Rate	3840		1920		Hz
Color Gray Scale	16384		16384		level
Contrast Ratio	4,000:1		4,500:1	4,000:1	-
Power Consumption(Max./Avg.)	300/100	420/140	270/90	390/130	W/m <sup>2</sup>
Viewing Angle(H/V)	140/140	140/120	140/140	140/120	° c
Panel Dimensions	500x1,000x65		500x1,000x65		Millimeter
Module Dimensions	250X250		250X250		Millimeter
Panel Weight	11		11		Kg
Panel Material	Die-casting Aluminium		Die-casting Aluminium		-
IP Rating	IP40/IP21		IP40/IP21		-
Operating Temperature	- 10~+40		- 10~+40		° c



 LEDium

ADRESSE (Google Maps)  
im Stöckmädie 27, 76307 Karlsbad



E-MAIL  
INFO@LEDIUM.DE



TELEFON  
+49 7248 947 90 25